
ADJUSTMENTS

TKG-UP


1. Number of Jumpman, Score Level, Coinage and Type (CPU P.C.Board)



	A	В	С	D	E	F	G	н
Number of Jumpman 3 4 5 6	OFF ON OFF ON	OFF OFF ON ON						
Score Level for extra Jumpman 7,000 points 10,000 points 15,000 points 20,000 points			OFF ON OFF ON	0FF 0N 0N				
Coinage 1 coin /1 play 1 coin /2 plays 1 coin /3 plays 1 coin /4 plays 2 coins/1 play 3 coins/1 play 4 coins/1 play 5 coins/1 play					OFF OFF OFF ON ON	OFF ON OFF ON OFF ON	OFF OFF ON OFF OFF ON	
Table / Upright Table Upright								OFF ON

2. Screen (VIDEO P.C.Board)


Semi-fixed resistors, VR1 and VR2 on VIDEO P.C. Board are used to adjust video monitor screen.




VRI	50 K Ω $1/3$ W top type white knob		Turn right to move image downward.
VR2	$50K\Omega$ 1/3W top type white knob	\bigcap	Turn right to move image leftward

3. Sound Balance (CPU P.C.Board)

Semi-fixed resistor, VR2 on CPU P.C.Board is used to adjust sound balance.

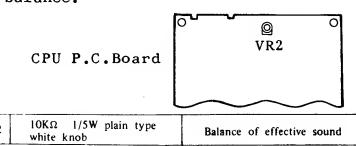

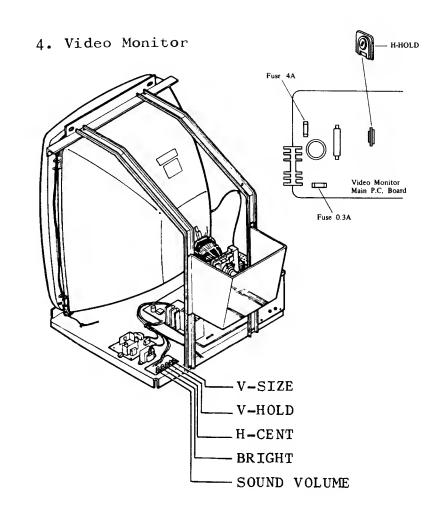

Do not touch the inside of the video monitor in which many parts are supplied with high tension.

CAUTIONS

- (1) Turn the power off before exchanging and removing the P.C.Board and connectors.
- (2) Do not touch IC, LSI and other electronic parts on P.C.Boards. Do not use a tester or the like on them.
- (3) P.C.Board to be stored or transported should be wrapped by a conductive pouch or aluminum foil.
- (4) P.C.Board should not be exposed direct to the sun.
- (5) When soldering, use soldering iron of which end is grounded.